


Terry Airport

Standards Review Nonstandard Conditions & Notes

RUNWAY: 7/25
ARC: B-II (SMALL)
APPROACH CATEGORY: VISUAL

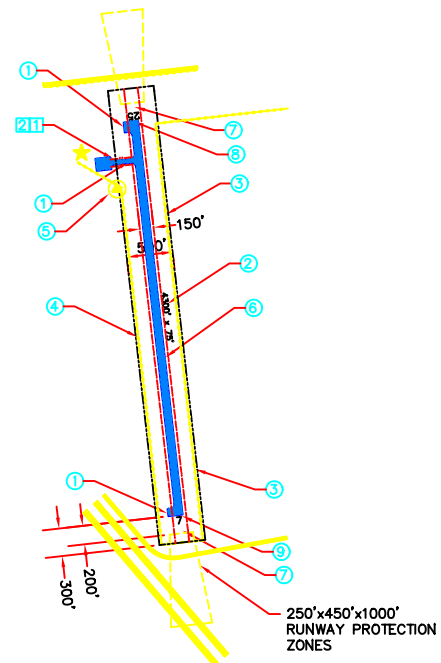

Runway 7 / 25

- ① HOLD LINES ARE LESS THAN 125' FROM RUNWAY CENTERLINE.
- ② RUNWAY LENGTH RECOMMENDED TO MEET 100% OF SMALL AIRCRAFT NEEDS (4,660 FT).
- ③ FENCE IN OFA, ENTIRE LENGTH OF RUNWAY.
- ④ FENCE POSSIBLY IN OFA IN PLACES.
- ⑤ WINDCONE PENETRATES TRANSITIONAL SURFACE.
- ⑥ PAVEMENT EDGES ARE FLUSH.
- ⑦ VERY SLIGHTLY RISING TERRAIN IN RSA.
- ⑧ TWO MISSING THRESHOLD LIGHTS.
- ⑨ THRESHOLD LIGHTS ARE 8'-9' FROM PAVEMENT EDGE, SHOULD BE 10'.

Taxiways & Aprons

- ① PAVEMENT EDGES ARE FLUSH.
- ② NO TAXIWAY LIGHTING.

SAFETY AREAS (RSA) (TSA)	ROAD
OBJECT FREE AREAS (OFA)	BEACON
RUNWAY PROTECTION ZONE (RPZ)	SEGMENTED CIRCLE & WIND CONE
PAVEMENT	WIND CONE
FENCE	



TERRY,
MONTANA

DATE
APRIL 1, 1995

